

#### WHAT MAKES US WHAT WE ARE?

- Largest safety shoe manufacturer in India producing more than 40 Lakh pairs per annum (11,000 pairs a day)
- Highly automated plants with imported machines like Desma (Germany), Clarks (UK), Zuki (Japan)
- Widest range of safety footwear catering to a broad spectrum of specific industrial applications
- · Products tested and certified from laboratories like CLRI, CLI, FDDI, PFI
- · Customisable shoes to meet individual user requirements
- In-house Research & Development to support design and product innovation

Above all, an overriding commitment to quality and customer service!

# AT THE CUTTING EDGE OF TECHNOLOGY MULTI-COLOURED MULTI-DENSITY SOLES



DUAL-DENSITY DIP PU-RUBBER



DUAL-DENSITY



DUAL-DENSITY DIP PU-TPU



TRIPLE-DENSITY DIP PVC



DOUBLE-DENSITY DIP PVC





#### **AWARDS**

#### WINNER





EMERGING ENTREPRENEUR

AWARD

LEATHER CATEGORY

# WINNER - INDIA's BEST SME'S





#### PROTECTING INDIA'S CORPORATE FOOTPRINT











































































































































# SAFETY SHOE FEATURES





#### SUPPLE

## LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY CEMENTED CONSTRUCTION SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- ☐ Cemented Construction Double Density EVA-Rubber Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Microfiber in Nubuck Finish with Water Repellent Properties, Respiro Mesh and "Ultrans-Tech" Reflective Logo
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent CORDURA lining with anti-bacterial treatment for odour control
- □Orthocomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- **□Sole Property: Antistatic 100Kohm-1000Mohm**
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45 mm; Toe Height: 20 mm
- ☐ Fitting: EE; Last: BW 2001
- ☐ Size : 40 46



#### **ACROBAT**

#### LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY CEMENTED CONSTRUCTION SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- ☐ Cemented Construction Double Density EVA-Rubber Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Microfiber in Nubuck Finish with Water Repellent Properties, Respiro Mesh and "Ultrans-Tech" Reflective Logo
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- □Orthocomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- □Sole Property: Antistatic 100Kohm-1000Mohm
- □ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45 mm; Toe Height: 20 mm
- ☐ Fitting: EE; Last: BW 2001
- ☐ Size : 40 46

12 MONTHS SOLE

**WARRANTY** 





#### TUMBLER

LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY CEMENTED CONSTRUCTION SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- ☐ Cemented Construction Double Density EVA-Rubber Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Suede Grain Buffalo Leather with Water Repellent Properties, Respiro Mesh
- ☐ Nickel Plated Round Brass Eyelets
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- □Orthocomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- **□Sole Property: Antistatic 100Kohm-1000Mohm**
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45 mm; Toe Height: 20 mm
- ☐ Fitting: EE; Last: BW 2001
- ☐ Size : 40 46




#### TRAPEZ

### LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY CEMENTED CONSTRUCTION SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- ☐ Cemented Construction Double Density EVA-Rubber Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Apollo Grain Buffalo Leather with water-repellent properties (Water-resistant for up to 60 minutes) and "Ultrans-Tech" Reflective Strips
- ☐ Nickel Plated Round Brass Eyelets
- ☐ EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and
- protection from ankle twisting ☐ Imported, soft, breathable and absorbent PERMASPUN
- lining with anti-bacterial treatment for odour control
- ☐ Orthocomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- □Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 38mm; Toe Height: 28 mm
- ☐ Fitting: EE; Last: 522
- ☐ Size : 39 44



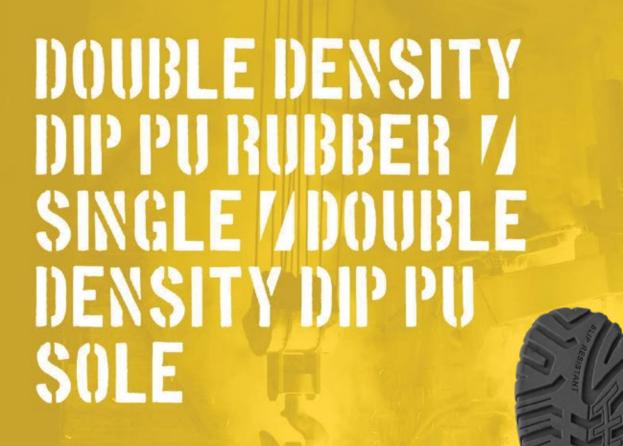





#### STURDY

CROMA RANGE: LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY DIP PU RUBBER SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 HRO SRC ☐ Direct Injection Double Density PU Rubber Sole for
- enhanced safety, comfort and durability
- □ Upper in finest quality Black Tango Grain Buffalo Leather □ Nickel-plated Round Eyelets
- □EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- □Anatomically shaped lasts with curved heel and rounded
- edges for greater comfort after long periods of wear
- □ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Orthocomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45mm; Toe Height: 33 mm
- ☐ Fitting: EE; Last: 522
- ☐ Size : 38 46

HSN CODE

12 MONTHS SOLE WARRANTY





64034000

#### **TRITON**

CROMA RANGE: LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY DIP PU PU SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 SRC
- ☐ Direct Injection **Double Density PU Sole** for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Microfiber in Nubuck Finish with Water Repellent Properties (Water-resistant for up to 60 minutes) and "Ultrans-Tech" Reflective Strips
- ☐ Nickel-plated Round Eyelets
- EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Orthocomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45mm; Toe Height: 33 mm
- ☐ Fitting: EE; Last: 522
- □ Size : 38 46
  HSN CODE

12 MONTHS SOLE WARRANTY



64034000

#### **FROLIC**

CROMA RANGE: LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY DIP PU SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- ☐ Direct Injection **Double Density PU Sole** for enhanced safety, comfort and durability
- ☐ Upper in finest quality Olive Suede Grain Buffalo Leather with Black Crazy Horse Print Grain Buffalo Leather on Toe & Respiro Mesh
- ☐ Nickel-plated Round Eyelets
- EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Orthocomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45mm; Toe Height: 33 mm
- ☐ Fitting: EE; Last: 522; **Size : 38 46**





64034000

HSN CODE

#### **FRIVO**


CROMA RANGE: LOW ANKLE SAFETY SHOE WITH SINGLE DENSITY DIP PU SOLE


- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- ☐ Direct Injection **Single Density PU Sole** for enhanced safety, comfort and durability
- ☐ Upper in finest quality Olive Suede Grain Buffalo Leather with Black Crazy Horse Print Grain Buffalo Leather on Toe
- ☐ Nickel-plated Round Eyelets
- EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Orthocomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45mm; Toe Height: 33 mm
- ☐ Fitting: EE; Last: 522; **Size : 38 46**

12 MONTHS SOLE WARRANTY

HSN CODE WA



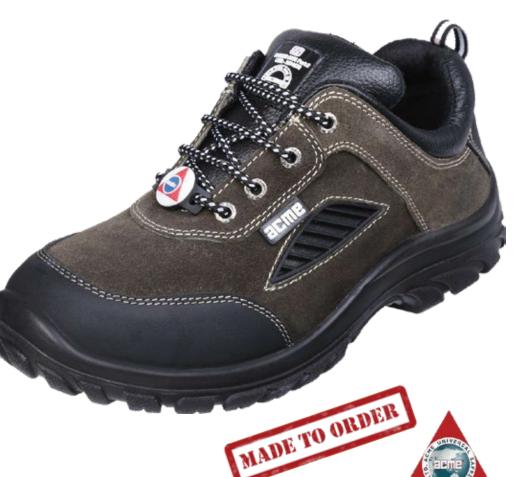

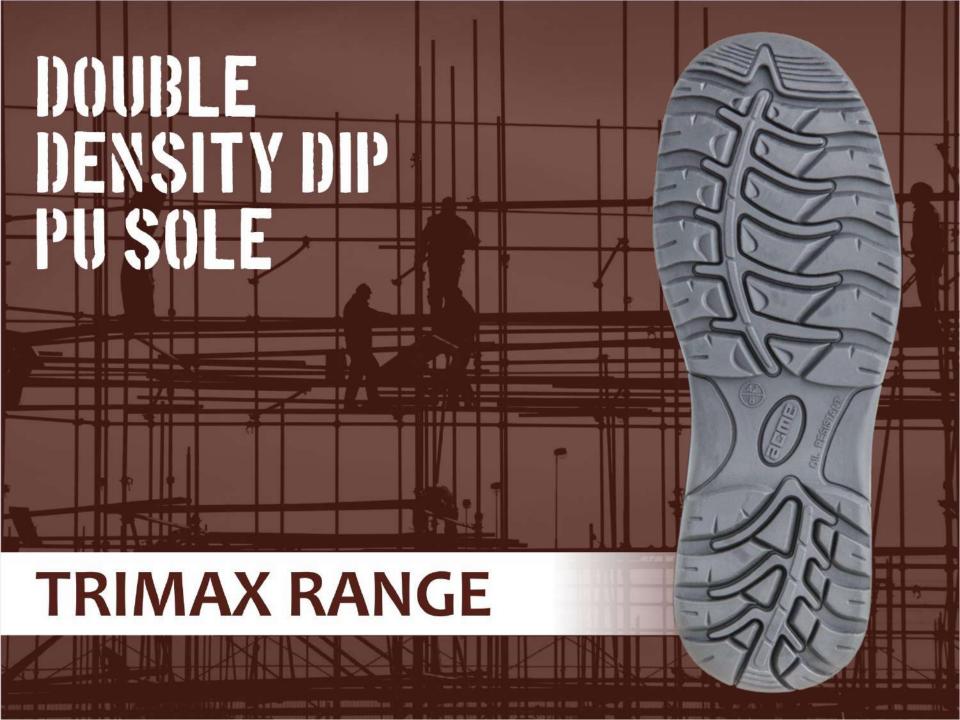

#### TAN X

TRIMAX RANGE: LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY DIP PU PU SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 SRA
- ☐ Direct Injection **Double Density PU Sole** for enhanced safety, comfort and durability
- ☐ Upper in finest quality Camel Colour Nu Buck Grain Buffalo Leather with water repellent properties (Water-resistant for up to 60 minutes)
- ☐ Black Oxidised Brass D-Ring Eyestays
- ☐ EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent SPACER lining with anti-bacterial treatment for odour control
- ☐ Orthocomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 35mm; Toe Height: 22 mm
- ☐ Fitting: EE; Last: 443; **Size : 39 46**

HSN CODE



#### **ADJACENT**

TRIMAX RANGE: LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY DIP PU PU SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRA
- ☐ Direct Injection **Double Density PU Sole** for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Tango Grain Buffalo Leather
- ☐ Nickel Plated Round Brass Eyelets
- □ EN certified, imported, powder coated, rust proof, extra wide
- alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Duracomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 35mm; Toe Height: 22 mm
- ☐ Fitting: EE; Last: 443
- ☐ Size: 39 46

HSN CODE









#### NEUTRON

AVIATOR RANGE: LOW ANKLE SAFETY SHOE WITH COMPOSITE TOE CAP FOR ENHANCED ELECTRICAL **SAFETY** 

- ☐ As per ISO 50321 SB I SRC
- ☐ Direct Injection Double Density PU Sole for enhanced safety, comfort and durability
- □ 100% metal free design.
- ☐ Upper in finest quality Black Barton Grain Buffalo Leather
- Non-Metallic Round Eyelets
- ☐ EN certified, imported, Composite toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Bloom Stride Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- □ Sole electrical resistance Max 22 KV for 1 minute exposure (Working Potential: 24 KV; Threshold Potential: 22 KV)
- **□**USAGE: Shockproof when electric charge (eg. naked wire) comes in contact ONLY through sole
- □ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 37mm; Toe Height: 24 mm
- ☐ Fitting: EE; Last: 552
- ☐ Size : 39 46

12 MONTHS SOLE HSN CODE **WARRANTY** 
























The Value/Effectivity of electrical shock resistance of the sole keeps on reducing as per the ageing & usage of the sole.

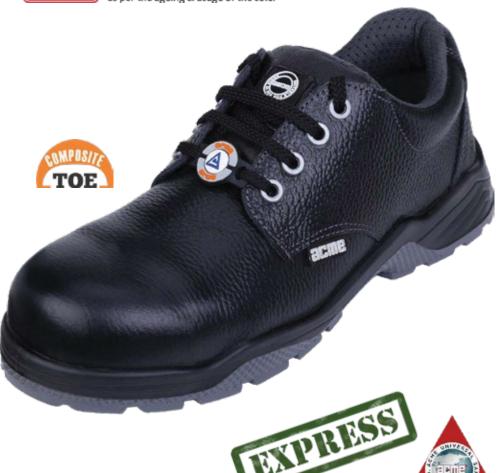

64034000

#### MULIDIR

AVIATOR RANGE: LOW ANKLE SAFETY SHOE WITH SINGLE DENSITY DIP PU SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 SRC
- ☐ Direct Injection Single Density PU Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Apollo Grain Buffalo Leather with Water Repellent Properties (Water-resistant for up to 60 minutes)
- ☐ Nickel-plated Eyelets
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Bloom Stride Insocks with Anti-Bacterial properties
- ☐ Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- Sole Property: Antistatic (Resistance up to 11 KV)
  - Sole electrical resistance 100Kohm-1000Mohm
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 37mm; Toe Height: 24 mm
- ☐ Fitting: EE; Last: 552; Size: 39 46

HSN CODE

64034000





#### AGILE

AVIATOR RANGE: LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY DIP PU SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 SRC
- ☐ Direct Injection **Double Density PU Sole** for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Apollo Grain Buffalo Leather with water-repellent properties (Water-resistant for up to 60 minutes)
- ☐ Nickel-plated Eyelets
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- Bloom Stride Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 37mm; Toe Height: 24 mm
- ☐ Fitting: EE; Last: 552; **Size : 39 46**

HSN CODE

64034000



#### OZONE

AVIATOR RANGE: LOW ANKLE SLIP ON DESIGN FOR ENHANCED COMFORT AND EASE

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- ☐ Direct Injection **Double Density PU Sole** for enhanced safety, comfort and durability
- □ 100% metal free design
- ☐ Upper in finest quality Black Barton Grain Buffalo Leather
- EN certified, imported, Composite toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Bloom Stride Insocks with Anti-Bacterial properties
- ☐ Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- □ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 37mm; Toe Height: 24 mm
- ☐ Fitting: EE; Last: 552;

□Size: 39 - 46

HSN CODE

12 MONTHS SOLE **WARRANTY** 

64034000























EXPRES

#### ZIPPY

AVIATOR RANGE: LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY DIP PU PU SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 SRC
- ☐ Direct Injection Double Density PU Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Synergy Proflex Material with water repellent properties (Water-resistant for up to 60 minutes)
- ☐ Nickel-plated Eyelets
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Bloom Stride Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- □Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical, and fuel resistant sole
- ☐ Heel Height: 37mm; Toe Height: 24 mm
- ☐ Fitting: EE; Last: 552; Size: 39 46

HSN CODE

12 MONTHS SOLE WARRANTY

64034000







#### SLICK

AVIATOR RANGE: LOW ANKLE SAFETY SHOE WITH DOUBLE DENSITY DIP PU PU SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 SRC
- ☐ Direct Injection Double Density PU Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Coffe Barton Grain Buffalo Leather with Water resistance for up to 360 minutes with Acid & Alkali Proof
- ☐ Nickel-plated Eyelets
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Bloom Stride Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- □Sole Property: Antistatic 100Kohm-1000Mohm
- □ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 37mm; Toe Height: 24 mm
- ☐ Fitting: EE; Last: 552; Size: 39 46

HSN CODE

12 MONTHS SOLE WARRANTY

64034000



















#### **ALLOY**

#### SSTEELE RANGE: LOW ANKLE BASIC NO FRILLS DESIGN FOR COMPANY WORKMEN

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- ☐ Direct Injection Single Density PU Sole for enhanced durability
- ☐ Upper in finest quality Black Barton Grain Buffalo Leather
- □Nickel Plated Round Brass Eyelets
- EN certified, imported, powder coated, rust proof, extra wide
- alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Duracomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ■Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 48mm; Toe Height: 30 mm
- ☐ Fitting: EE; Last: 443
- ☐ Size : 38 47

HSN CODE

64034000





















#### **STORM**

SSTEELE RANGE: LOW ANKLE ROUGH & TOUGH **DESIGN FOR COMPANY WORKMEN** 

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- ☐ Direct Injection Double Density PU Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Barton Grain Buffalo Leather
- ☐ Nickel Plated Round Brass Eyelets
- ☐ EN certified, imported, powder coated, rust proof, extra wide
- alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Duracomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 48mm; Toe Height: 30 mm
- ☐ Fitting: EE; Last: 443
- ☐ Size: 38 47

HSN CODE

64034000

























#### KETONE

SSTEELE RANGE: LOW ANKLE SMART FORMAL DESIGN FOR COMPANY STAFF

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 SRC
- ☐ Direct Injection **Double Density PU Sole** for enhanced safety, comfort and durability
- ☐ Upper in finest quality Upper in finest quality Black Apollo Grain Buffalo Leather with water-repellent properties and "Ultrans-Tech" Reflective Logo
- ☐ Nickel Plated Round Brass Eyelets
- ☐ EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Duracomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- **□Sole Property: Antistatic 100Kohm-1000Mohm**
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 min exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 48mm; Toe Height: 30 mm
- ☐ Fitting: EE; Last: 443; Size : **38 47**



12 MONTHS SOLE WARRANTY



RYPRES

#### LITHIUM

SSTEELE RANGE: LOW ANKLE DOUBLE DENSITY **DIP SHOE WITH ESD PROTECTION** 

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- ☐ Direct Injection Double Density PU Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Barton Grain Buffalo Leather
- □Nickel Plated Round Brass Eyelets
- EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ ESD Insocks with Anti-Bacterial properties
- ☐ Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- **□** Sole Property: ESD
- □ Sole electrical resistance 100Kohm-35Mohm
- □ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 48mm; Toe Height: 30 mm
- ☐ Fitting: EE; Last: 443
- ☐ Size: 38 47

HSN CODE

64034000

12 MONTHS SOLE WARRANTY



















EXPRES

#### **BOXYLIC**

## SSTEELE RANGE: HIGH ANKLE DESIGN FOR ENHANCED PROTECTION

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- ☐ Direct Injection **Double Density PU Sole** for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Barton Grain Buffalo Leather
- ☐ Black Plated Brass D-Ring Eyestay
- EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Duracomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 48mm; Toe Height: 30 mm
- ☐ Fitting: EE; Last: 443
- □ Size : 38 47

HSN CODE 64034000







#### ASTUTE

DECORA RANGE: LOW ANKLE SMART LACE-UP CASUAL DESIGN FOR COMPANY MANAGERS

- ☐ CE certified. **EN ISO 20345:2011 S2 SRA**
- ☐ Direct Injection Single Density PU Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Ultra Soft Buffalo Leather
- ☐ Nickel Plated Round Brass Eyelets
- ☐ EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Imported, soft, breathable Synthetic lining with antimicrobial
- treatment for odour control
- ☐ Duracomfort Insocks with Anti-Bacterial properties
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- □ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance Max 120°C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 28mm; Toe Height: 15mm
- ☐Fitting: EE
- □ Last: 443, Size: 39 46

HSN CODE

64041190

























## 

#### LADIES SAFETY SHOE WITH LACE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 SRA
- ☐ Direct Injection Single Density PU Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Polish Grain Buffalo Leather with water-repellent properties (Water-resistant for up to 60 minutes)
- ☐ Nickel Plated Round Brass Eyelets
- ☐ Extra wide **steel toe cap with 200 Joules** impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Duracomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- □Sole Property: Antistatic 100Kohm-1000Mohm
- □ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 38 mm; Toe Height: 17 mm
- ☐ Fitting: EE; Last: 443
- ☐ Size : 36 41

HSN CODE

64034000



















#### WENDY

#### SLIP ON LADIES SAFETY SHOE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 SRA
- ☐ Direct Injection Single Density PU Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Black Polish Grain Buffalo Leather with water-repellent properties (Water-resistant for up to 60 minutes)
- ☐ Extra wide **steel toe cap with 200 Joules** impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Duracomfort Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- □ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 38 mm; Toe Height: 17 mm
- ☐ Fitting: EE; Last: 443
- ☐ Size : 36 41























## AVIAN

PLUME RANGE: LOW ANKLE SAFETY SHOE WITH DPP DOUBLE DENSITY PU SOLE

- ☐ EN ISO 20345:2011 S1 SRA
- **□** Double Density, light weight, DPP PU Sole
- ☐ Upper in Black Barton Buffalo Leather
- ☐ Nickel Plated Round Brass Eyelets
- EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Soft and breathable PERMASPUN lining with antibacterial treatment for odour control
- ☐ Bloom Stride Insocks with Anti-Bacterial properties
- ☐ Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 37 mm; Toe Height: 21 mm
- ☐ Fitting: EE☐ Last: 522
- ☐ Size : 35 45



## ELICS

#### RUGGED AND STURDY LOW ANKLE SHOES FOR WORKMEN

- ☐ As per IS 2584:1964 SB I SRC
- ☐ Double Density, light weight, DPP PU Sole
- ☐ Upper in Black Barton Buffalo Grain Leather
- ☐ Round Non-Metallic Eyelets
- □ 100% metal free design.
- ☐ EN certified, imported, Composite toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Bloom Stride Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole electrical resistance Max 18 KV for 1 minute exposure (Working Potential: 20 KV; Threshold Potential: 18 KV)
- □ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 37 mm; Toe Height: 21 mm
- ☐ Fitting: EE
- ☐ Last: 443
- ☐ Size : 35 45

HSN CODE

64034000

12 MONTHS SOLE **WARRANTY** 






















The Value/Effectivity of electrical shock resistance of the sole keeps on reducing as per the ageing & usage of the sole.

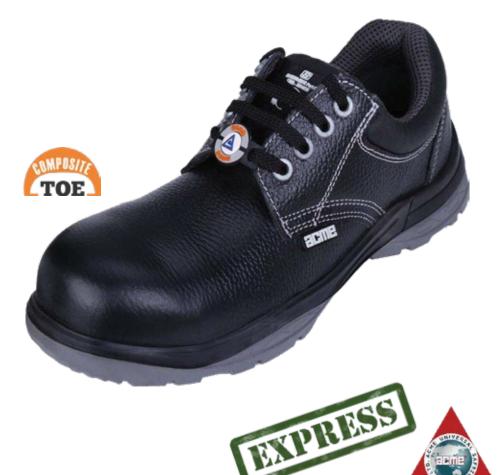

#### JUDY

#### LADIES SAFETY SHOE





















- ☐ ISI certified, EN ISO 20345:2011 S2 SRA ☐ Single Density, light weight, DPP PU Sole ☐ Upper in MICRO-BIRE with water-repellent properties (Waterresistant for up to 60 minutes) ☐ Nickel Plated Round Brass Eyelets ☐ EN certified, Composite Toe cap with 200 Joules impact resistance ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear ☐ Soft and breathable PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm □ Sole electrical resistance –(Resistance up to 11 KV)

☐ Bloom Stride Insocks with Anti-Bacterial properties

- □ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole

□Completely free of Azo dyes as it uses water based adhesives, as

- ☐ Heel Height: 37 mm; Toe Height: 21 mm
- ☐ Fitting: EE

per European norms.

☐ Last: 522; **Size : 35 - 45** 



12 MONTHS SOLE 64034000 **WARRANTY** 





#### BLIV

#### RUGGED AND STURDY LOW ANKLE SPORTY SHOES FOR WORKMEN

- □CE and ISI certified, EN ISO 20345:2011 S2 SRA
- ☐ Double Density, light weight, DPP PU Sole
- ☐ Upper in Black Crazy Horse Print Grain Buffalo Leather with water-repellent properties (Water-resistant for up to 60 minutes)
- ☐ Antique Finish Single Line Camel Hook Brass Eyestays
- ■EN certified, imported, powder coated, rust proof, extra
- wide alloy steel toe cap with 200 Joules impact resistance ☐ Anatomically shaped lasts with curved heel and rounded
- edges for greater comfort after long periods of wear
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based
- adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- □ Sole electrical resistance –(Resistance up to 11 KV)
- □ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 35 mm; Toe Height: 22 mm
- ☐ Fitting: EE; Last: 443
- ☐ Size : 39 45

HSN CODE

12 MONTHS SOLE WARRANTY

64034000































## VOLANT

LOW ANKLE SAFETY SHOE WITH DPP DOUBLE DENSITY PU SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- **☐** Double Density, light weight, DPP PU Sole
- ☐ Upper in Nubuck finish Microfiber, with Respiro Mesh
- ☐ Nickel Plated Round Brass Eyelets
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Soft and breathable PERMASPUN lining with anti-
- bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- □Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel
- resistant sole
- ☐ Heel Height: 40 mm; Toe Height: 20 mm
- ☐ Fitting: EE☐ Last: 522☐ ☐ Color C
- ☐ Size : 39 46





#### ASTEROID

BASIC NO FRILLS LOW ANKLE SHOES **FOR WORKMEN** 



- ☐ Single Density, light weight, DPP PU Sole
- ☐ Upper in Black Barton Buffalo Leather
- ☐ Nickel Plated Round Brass Eyelets
- ☐ ISI certified, extra wide steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Imported, soft, breathable and absorbent PERMASPUN
- lining with anti-bacterial treatment for odour control □Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 35 mm; Toe Height: 27 mm
- ☐ Fitting: H ☐ Last: H-95
- ☐ Size : 39 46

HSN CODE

64034000























## GRAVITY

## BASIC NO FRILLS LOW ANKLE SHOES FOR CONTRACT WORKMEN

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- ☐ Single Density, light weight, DPP PU Sole
- ☐ Upper in Black Barton Buffalo Leather
- ☐ Nickel Plated Round Brass Eyelets
- ☐ ISI certified, extra wide steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 35 mm; Toe Height: 27 mm
- ☐ Fitting: H☐ Last: H=94
- □ Last: H-95□ Size : 39 46

HSN CODE

64034000

12 MONTHS SOLE WARRANTY



EXPRES

#### **ATOM**

## RUGGED AND STURDY LOW ANKLE SHOES FOR WORKMEN

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- ☐ Single Density, light weight, DPP PU Sole
- ☐ Upper in Black Barton Buffalo Leather
- ☐ Nickel Plated Round Brass Eyelets
- ☐ ISI certified, extra wide steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Imported, soft, breathable and absorbent PERMASPUN
- lining with anti-bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant
- sole
- ☐ Heel Height: 35 mm; Toe Height: 27 mm
- ☐ Fitting: H☐ Last: H-95
- ☐ Size : **39 46**

HSN CODE

64034000



#### RAPID

## BASIC NO FRILLS HIGH ANKLE SAFETY SHOE

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRAC
- ☐ Single Density, light weight, DPP PU Sole
- ☐ Upper in Black Meena Buffalo Leather with Embossed Logo
- ☐ Black Plated Brass D-Ring Eyestay
- ☐ ISI certified, extra wide steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Imported, soft, breathable and absorbent PERMASPUN
- lining with anti-bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- D II 1 II 1-1-4- 25
- ☐ Heel Height: 35 mm; Toe Height: 27 mm
- ☐ Fitting: H☐ Last: H-95☐
- ☐ Size : 39 46

Size . 39 - 40

HSN CODE

64034000



#### ERIS

#### LOW ANKLE SAFETY SHOES WITH WIDE TOE **CAP FOR EXTRA COMFORT**

- ☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC
- **□** Double Density, light weight, DPP PU Sole
- ☐ Upper in finest quality Black Barton Buffalo Leather
- ☐ Nickel Plated Round Brass Eyelets
- ☐ EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Imported, soft, breathable and absorbent PERMASPUN
- lining with anti-bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based
- adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant
- sole
- ☐ Heel Height: 35 mm; Toe Height: 27 mm
- ☐ Fitting: H ☐ Last: H-95
- ☐ Size : 39 46























#### **ORION**

LOW ANKLE SAFETY SHOES WITH WIDE TOE **CAP FOR EXTRA COMFORT** 

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 SRC
- ☐ Double Density, light weight, DPP PU Sole
- ☐ Upper in finest quality Black Apollo Grain Buffalo Leather with water-repellent properties (Water-resistant for up to 60 minutes) and "Ultrans-Tech" Reflective Strips
- ☐ Nickel Plated Round Brass Eyelets
- ☐ EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Imported, soft, breathable and absorbent PERMASPUN
- lining with anti-bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- □ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant
- sole
- ☐ Heel Height: 35 mm; Toe Height: 27 mm
- ☐ Fitting: H ☐ Last: H-95
- ☐ Size : 39 46

HSN CODE

64034000





















## TRIVIA

LOW ANKLE SAFETY SHOE WITH SINGLE DENSITY **DIP PU SOLE** 

- ☐ CE and ISI certified. EN ISO 20345:2011 S1 SRC
- Direct Injection Single Density PU Sole for enhanced safety, comfort and durability
- ☐ Upper in finest quality Olive Suede Grain Buffalo Leather with Black Crazy Horse Print Grain Buffalo Leather on Toe
- ☐ Nickel-plated Round Eyelets
- EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- ☐ Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- Sole electrical resistance (Resistance up to 11 KV)
- □ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45mm; Toe Height: 33 mm
- Fitting: EE; Last: 522; Size: 38 46

HSN CODE

64034000























## **KAROO**

## HIGH ANKLE SAFETY SHOES WITH WIDE TOE CAP FOR EXTRA COMFORT

☐ CE and ISI certified, EN ISO 20345:2011 S1 SRC

☐ Double Density, light weight, DPP PU Sole ☐ Upper in finest quality Black Barton Grain Buffalo Leather ☐ Black Oxidised Brass D-Ring Eyestays ☐ EN certified, imported, powder coated, rust proof, extra wide alloy steel toe cap with 200 Joules impact resistance ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control ☐ Comfort Zone Insocks with Anti-Bacterial properties □Completely free of Azo dyes as it uses water based adhesives, as per European norms. ☐ Sole Property: Antistatic 100Kohm-1000Mohm ☐ Sole electrical resistance –(Resistance up to 11 KV) ☐ Sole heat resistance - Max 120° C for 1 minute exposure ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole

HSN CODE

☐ Fitting: H☐ Last: H-95☐ Size: 39 - 46

HSN CODE 12 MONTHS SOLE WARRANTY


☐ Heel Height: 35 mm; Toe Height: 27 mm









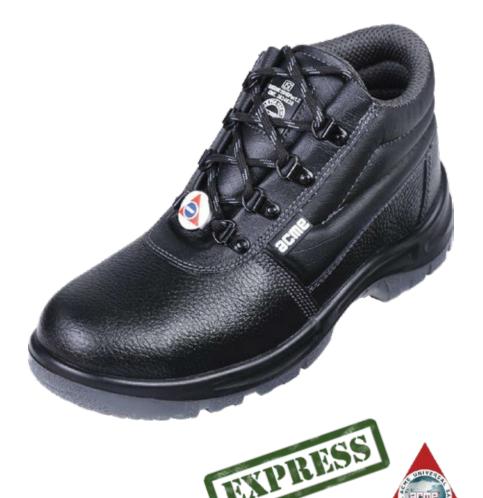

## PRE-MOULDED MONODENSITY RUBBER SOLE

**SWELTER RANGE** 



## ROCKY

#### LOW ANKLE DESIGN WITH RUBBER SOLE

- □CE and ISI certified, EN ISO 20345:2011 S2 I HRO SRA
- ☐ Cemented Construction Single Density Vulcanized Rubber

Sole MADE WITH INTERNATIONAL PREMIUM

**RUBBER** for enhanced safety, comfort and durability

- ☐ Upper in Black Barton Buffalo Grain Leather with water repellent properties
- ☐ Nickel Plated Round Brass Eyelets
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Soft and breathable PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- □ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance MAX 500° C FOR 1 MINUTE

#### **EXPOSURE**

- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 37 mm; Toe Height: 21 mm
- ☐ Fitting: EE
- 12 MONTHS SOLE ☐ Last: 522: Size: 38 - 47 WARRANTY















## ROCKY ULTRA

## HIGH ANKLE DESIGN WITH RUBBER SOLE

- □CE and ISI certified, EN ISO 20345:2011 S2 I HRO SRA
- ☐ Cemented Construction Single Density Vulcanized Rubber

Sole MADE WITH INTERNATIONAL PREMIUM

**RUBBER** for enhanced safety, comfort and durability

- ☐ Upper in Black Barton Buffalo Grain Leather with water repellent properties
- ☐ Nickel Plated Round Brass Eyelets
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Soft and breathable PERMASPUN lining with anti-bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ Sole heat resistance MAX 500° C FOR 1 MINUTE

#### **EXPOSURE**

- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 37 mm; Toe Height: 21 mm
- ☐ Fitting: EE
- ☐ Last: 522; Size : **38 47**12 MONTHS SOLE

  WARRANTY















#### **COPPER CHIMNEY ULTRA**

## HIGH ANKLE DESIGN FOR HIGH TEMP WORKING

- **EN ISO 20345:2011 SB I HRO SRA**
- ☐ Cemented Construction Single Density Nitrile Rubber Sole for enhanced protection and durability
- Sole for enhanced protection and durability
- ☐ Upper in Black Barton Buffalo Grain Leather
- ☐ Black Plated D-Ring Brass Eyestays
- ☐ Imported, soft, breathable and absorbent PERMASPUN lining with anti-bacterial treatment for odour control
- □Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ ISI certified, extra wide steel toe cap with 200 Joules impact resistance
- ☐ Sole electrical resistance Max 15 KV for 1 minute exposure
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 37 mm; Toe Height: 17 mm
- ☐ Fitting: EE☐ Last: 522☐ Gi
- ☐ Size : **39 45**

HSN CODE

64034000





















#### **COPPER CHIMNEY**

#### LOW ANKLE DESIGN FOR HIGH TEMP WORKING

- ☐ EN ISO 20345:2011 SB I HRO SRA
- ☐ Cemented Construction Single Density Nitrile Rubber
- Sole for enhanced protection and durability
- ☐ Upper in Black Barton Buffalo Grain Leather
- ☐ Nickel Plated Round Brass Eyelets
- ☐ Imported, soft, breathable and absorbent PERMASPUN
- lining with anti-bacterial treatment for odour control
- ☐ Comfort Zone Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based
- adhesives, as per European norms.
- ☐ ISI certified, extra wide steel toe cap with 200 Joules impact resistance
- ☐ Sole electrical resistance Max 15 KV for 1 minute exposure
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel
- resistant sole
- ☐ Heel Height: 37 mm; Toe Height: 17 mm
- ☐ Fitting: EE
- ☐ Last: 522
- ☐ Size : **39 45**

HSN CODE























#### APOGEE

ZENITH RANGE: LOW ANKLE SMART CASUAL SHOES FOR EXECUTIVES



- ☐ Upper in **Black International Hide**
- ☐ Toe puff 0.9mm Ping Pong Material
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent Black Mesh lining with anti-bacterial treatment for odour control
- □ **Orthocomfort insocks** with anti-bacterial treatment
- ☐ Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- **☐** Sole Property: Shock Proof
- ☐ Sole electrical resistance Max 15 KV for 1 minute exposure
- ☐ Sole temperature resistance Max 120° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 20mm; Toe Height: 8mm
- ☐ Soft Insoles for all-day comfort
- ☐ Closure Type: Lace
- ☐ Padded Collar for Extra Comfort
- ☐ Last: V-513 ☐ Size : 39 45

HSN CODE

64034000



















## I-SQUARE

**RAINWEAR: FULL PVC GUM BOOT** 

☐ CE and ISI certified, EN ISO 20345:2011 SB I SRA ☐ Direct Injection **PVC Gumboot** with Single density sole **□** Boot height: 14"/12"/10" ☐ Breathable Textile Lining with anti-bacterial treatment for odour control □Completely free of Azo dyes as it uses water based adhesives, as per European norms. ☐ ISI certified, extra wide steel toe cap with 200 Joules impact resistance ☐ Sole electrical resistance - Max 15 KV for 1 minute exposure ☐ Sole heat resistance - Max 150°C for 1 minute exposure ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole ☐ Heel Height: 34 mm; Toe Height: 20 mm ☐ Last: 443 ☐ Size : 40 - 45



















HSN CODE

12 MONTHS SOLE WARRANTY 6401 10 90



#### TRENDS

GRIPP RANGE: ROUGH & TOUGH SHOES FOR CONTRACT / TEMPORARY WORKMEN

- ☐ CE Certified, EN ISO 20345:2011 S1 SRA
- ☐ Direct Injection Double Density Nitrile PVC Sole
- ☐ Upper in Black Barton Buffalo Leather
- ☐ Nickel Plated Round Brass Eyelets
- ☐ Imported, soft, breathable and absorbent SPACER lining
- with anti-bacterial treatment for odour control
- ☐ Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- □ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ ISI certified, extra wide steel toe cap with 200 Joules
- impact resistance
- ☐ Sole heat resistance Max 150°C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel
- resistant sole
- ☐ Heel Height: 42 mm, Toe Height: 21 mm
- ☐ Fitting: H
- ☐ Last: H-2000
- ☐ Size: 39 46



HSN CODE

64034000

#### TENOR

GRIPP RANGE: ROUGH & TOUGH SHOES FOR CONTRACT / TEMPORARY WORKMEN

- ☐ CE Certified, EN ISO 20345:2011 S2 SRA
- ☐ Direct Injection Double Density Nitrile PVC Sole
- ☐ Upper in finest quality Black Apollo Grain Buffalo Leather with water-repellent properties (Water-resistant for up to 60 minutes)
- ☐ Nickel Plated Round Brass Eyelets
- ☐ Imported, soft, breathable and absorbent SPACER lining with anti-bacterial treatment for odour control
- □Completely free of Azo dyes as it uses water based
- adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- ☐ ISI certified, extra wide steel toe cap with 200 Joules impact resistance
- ☐ Sole heat resistance Max 150°C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 42 mm, Toe Height: 21 mm
- ☐ Fitting: H
- ☐ Last: H-2000
- ☐ Size: 39 46



64034000





















#### TIGUA

GRIPP RANGE: ROUGH & TOUGH WATER **RESISTANT HIGH ANKLE SHOES FOR** WORKMEN

- ☐ CE certified, EN ISO 20345:2011 S1 SRA
- **□**Direct Injection Double Density Nitrile PVC Sole
- □ Upper in Black Barton Buffalo Leather
- □Black Plated D-Ring Brass Eyestays
- ☐ Imported, soft, breathable and absorbent SPACER lining with anti-bacterial treatment for odour control
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic 100Kohm-1000Mohm
- ☐ Sole electrical resistance –(Resistance up to 11 KV)
- □ Extra wide steel toe cap with 200 Joules impact
- resistance
- □ Sole heat resistance Max 150°C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant
- sole
- □ Heel Height: 42 mm, Toe Height: 21 mm
- ☐ Fitting: H □Last: H-2000
- ☐ Size: 39 46



64041190



















# FULLY MOULDED DIP SINGLE DENSITY PVC SHOE

RAINWEAR SAFETY SHOES



#### COSMOS ULTRA

#### FULL PVC ANKLE BOOT WITH SPECIAL LACING

- □ SB SRA
- ☐ Direct Injection PVC Gumboot
- ☐ Nickel Plated Round Brass Eyelets
- ☐ Breathable Textile Lining with anti-bacterial treatment for odour control
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Extra wide **steel toe cap with 100 Joules** impact resistance
- ☐ Sole electrical resistance Max 15 KV for 1 minute exposure
- ☐ Sole heat resistance Max 150°C for 1 minute exposure
- ☐ Anti skid, shock absorbent, oil, chemical and fuel resistant sole
- ☐ Heel Height: 34 mm
- ☐ Toe Height: 20 mm ☐ Last: H-2000
- ☐ Size : 38 44





6401 10 90

















## GENERAL TERMS OF BUSINESS

Modus Operandi All transactions will be through ACME UNIVERSAL SAFEZONE 9 PRIVATE LIMITED

Taxes and Duties Goods & Services Tax

: Extra /Included@ 18 % or 5 %

(CGST/SGST/IGST/UTGST)

Footwear Basic Selling Price upto Rs. 1000/- @5% Footwear Basic Selling Price above Rs. 1000/- @18

%

<u>Delivery Charges</u> Freight cost extra/Freight cost included (FOR site)

Delivery Time GATIMAAN Models : Dispatch within 7 days of PO with sizes

EXPRESS Models : Dispatch within 4 – 6 wks of PO with sizes

MADE TO ORDER Models : Dispatch within 8 – 10 wks of PO with sizes

Payment Terms Against Proforma Invoice/Against delivery/With in 30 days from the date of receipt of

material

Shoes Size issue Please take the size roll from ACME/CHANNEL PARTNERS/DEALER/ACME

TEAM before the final placement of purchase order /sizes roll.

1. Size replacement, if any, will be done only till 15 days from the date of supply

of the material.

2. Size replacement will not be given for items which are made to order.



## WARRANTY CLAUSE


#### Aging of footwear w.r.t. sole component

Warranty Table (in months)			
	DIP	Pouring	Non-Leather Upper
PU/TPU/ Rubber Sole	12	12	12
PVC Sole	12	NA	12

#### We offer warranty for above offered shoes against

- 1. Detachment of sole from upper \*Image below
- 2. Development of Crack in the sole (Flaking of Sole) \*Image below
- 3. Abrasion of the sole

<sup>\*</sup>except leather damage by contact of water / chemical

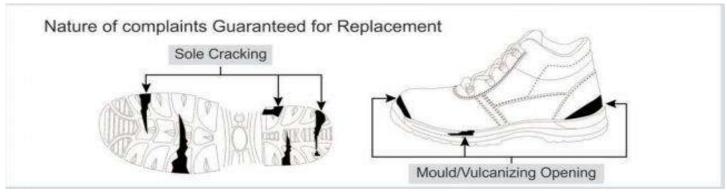

Note: Warranty will not be valid if damage in case of improper usage.


- 1. Impact of sharp object
- 2. Consumption in wrong application/industry Ex. Use of Synthetic Upper in Oil Sector.

#### **Exchange Policy**

- 1. Size replacement, if any, will only be done within 15 days from the date of supply of material
- 2. Replacement against warranty, post inspection, will be done within 15 days (requires pictures with year/month mark and condition of the shoe)



## **OUR PLANT IN GWALIOR**

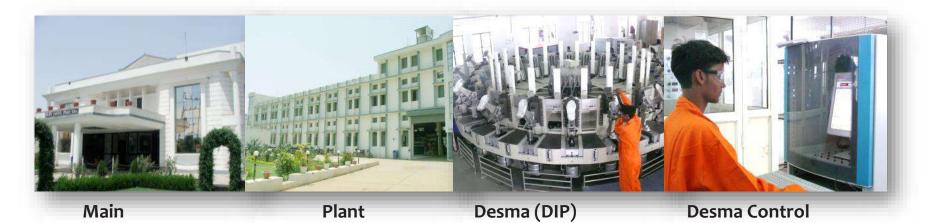



## SSTEELE DIP SOLE DESIGN AND FEATURES

CLEATED SOLE FOR FIRM GRIP ON UNEVEN AND SLIPPERY GROUND

WIDE SOLE FOR ROOMY FIT

TREADS FOR PROTECTION WHILE CLIMBING LADDER

ANTI TORSION SYSTEM FOR GREATER STABILITY AND PROTECTION FROM ANKLE TWISTING





## THANK YOU

Assuring you of our quality products, timely delivery & best services.

ACME UNIVERSAL SAFEZONÉ 9 PVT. LTD

CORPORATE OFFICE: 1209, Remi Commercio, Plot No. 14, Shah Industrial Estate,
Off Link Road, Andheri (W), Mumbai - 400053. Tel.: +91 22 62219292
WORKS: Agra-Bombay Road, Girwai, Gwalior - 474 001. (M. P.)
WEB: www.acmefabrik.com



#### **GASPORT**

## LOW ANKLE SAFETY SHOE WITH TRIPLE DENSITY DIP PU-PU-RUBBER SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- ☐ Direct Injection TRIPLE Density PU-PU-Rubber

**Sole** for enhanced safety, comfort and durability

- ☐ Upper in finest quality Black Microfiber in Nubuck Finish with Water Repellent Properties, Respiro Mesh and
- "Ultrans-Tech" Reflective Logo
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent lining with antibacterial treatment for odour control
- □ Solacestride Insocks with Anti-Bacterial properties
- □ Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic
- □Sole electrical resistance 100Kohm-1000Mohm
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45 mm; Toe Height: 21 mm
- ☐ Fitting: EE; Last: 2001
- ☐ Size: 38 47



3499/-



















#### **DURBECK**

#### LOW ANKLE SAFETY SHOE WITH TRIPLE DENSITY DIP PU-PU-RUBBER SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- ☐ Direct Injection TRIPLE Density PU-PU-Rubber

**Sole** for enhanced safety, comfort and durability

- ☐ Upper in finest quality Black Microfiber in Nubuck Finish with Water Repellent Properties, Respiro Mesh and
- "Ultrans-Tech" Reflective Logo
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent lining with antibacterial treatment for odour control
- ☐ Solacestride Insocks with Anti-Bacterial properties
- □ Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic
- ■Sole electrical resistance 100Kohm-1000Mohm
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45 mm; Toe Height: 21 mm
- ☐ Fitting: EE; Last: 2001
- ☐ Size: 38 47

**MRP** 





























#### **FLAKY**

#### LOW ANKLE SAFETY SHOE WITH TRIPLE DENSITY DIP PU-PU-RUBBER SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- □ Direct Injection TRIPLE Density PU-PU-Rubber

**Sole** for enhanced safety, comfort and durability

☐ Upper in finest quality Black MICROFIBER NUBUCK MOCHA leather with Water Repellent Properties, "Ultrans-

Tech" Matte Finished E-TPU on counter with Reflective Logo & Extended PU Guard on Toe.

- ■EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent lining with anti-
- bacterial treatment for odour control
- □ Solacestride Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic
- Sole electrical resistance 100Kohm-1000Mohm
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45 mm; Toe Height: 21 mm
- ☐ Fitting: EE; Last: 2001
- ☐ Size: 38 47

12 MONTHS SOLE WARRANTY































**MRP** 



#### **MURINO**

#### LOW ANKLE SAFETY SHOE WITH TRIPLE DENSITY DIP PU-PU-RUBBER SOLE

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- ☐ Direct Injection TRIPLE Density PU-PU-Rubber

**Sole** for enhanced safety, comfort and durability

- ☐ Upper in finest quality Black MICROFIBER NUBUCK MOCHA leather with Water Repellent Properties, "Ultrans-Tech" Matte Finished E-TPU on counter with Reflective Logo & Extended PU Guard on Toe.
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent lining with antibacterial treatment for odour control
- □ Solacestride Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic
- ☐ Sole electrical resistance 100Kohm-1000Mohm
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 45 mm; Toe Height: 21 mm
- ☐ Fitting: EE; Last: 2001
- ☐ Size: 38 47

12 MONTHS SOLE WARRANTY



















**MRP** 













#### **SPURT**

LOW ANKLE SAFETY SHOE WITH "SURGE SENSE" Double Density High Rebound E-TPU & Rubber Sole

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- ☐ Direct Injection "SURGE SENSE" Double

#### **Density High Rebound E-TPU & Rubber**

**Sole** for enhanced safety, comfort, flexibility and durability

- □ Upper in finest High Tensile Strength Fabric with Water Repellent Properties, Black E-TPU Film on toe for protection from abrasion
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent lining with antibacterial treatment for odour control
- ☐ Solacestride Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic
- Sole electrical resistance 100Kohm-1000Mohm
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 32 mm; Toe Height: 10 mm
- ☐ Fitting: EE; Last: 522

452 WONTHS SOLE

WARRANTY

































**MRP** 3499/-



#### **BOLT**

LOW ANKLE SAFETY SHOE WITH "SURGE SENSE" Double Density High Rebound E-TPU & Rubber Sole

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- ☐ Direct Injection "SURGE SENSE" Double

#### **Density High Rebound E-TPU & Rubber**

**Sole** for enhanced safety, comfort, flexibility and durability

- □ Upper in finest High Tensile Strength Fabric with Water Repellent Properties, Black E-TPU Film on toe for protection from abrasion
- ☐ EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent lining with antibacterial treatment for odour control
- ☐ Solacestride Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic
- Sole electrical resistance 100Kohm-1000Mohm
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 32 mm; Toe Height: 10 mm
- ☐ Fitting: EE; Last: 522

452 WONTHS SOLE

WARRANTY

































**MRP** 3499/-



#### **DART**

LOW ANKLE SAFETY SHOE WITH "SURGE SENSE" Double Density High Rebound E-TPU & Rubber Sole

- ☐ CE and ISI certified, EN ISO 20345:2011 S2 | HRO SRC
- ☐ Direct Injection "SURGE SENSE" Double

#### **Density High Rebound E-TPU & Rubber**

**Sole** for enhanced safety, comfort, flexibility and durability

- □ Upper in finest Synergy Proflex Material with Water **Repellent Properties**
- ■EN certified, Composite Toe cap with 200 Joules impact resistance
- ☐ Anatomically shaped lasts with curved heel and rounded edges for greater comfort after long periods of wear
- ☐ Special anti-torsion system for greater stability and protection from ankle twisting
- ☐ Imported, soft, breathable and absorbent lining with antibacterial treatment for odour control
- ☐ Solacestride Insocks with Anti-Bacterial properties
- □Completely free of Azo dyes as it uses water based adhesives, as per European norms.
- ☐ Sole Property: Antistatic
- □ Sole electrical resistance 100Kohm-1000Mohm
- ☐ Sole temperature resistance Max 300° C for 1 minute exposure
- ☐ Anti skid, oil, chemical and fuel resistant sole
- ☐ Heel Height: 32 mm; Toe Height: 10 mm
- ☐ Fitting: EE; Last: 522
- ☐ Size: 36 47

12 MONTHS SOLE WARRANTY































**MRP** 

3499/-

