
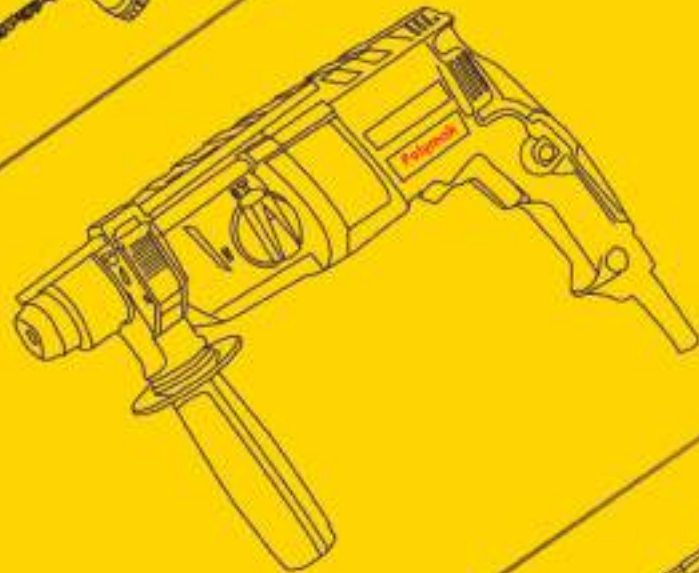


Polymak
Range of Products

QUALITY
SERVICE

Polymak[®]

SOLUTIONS PROVIDER FOR INDUSTRY & TRADE

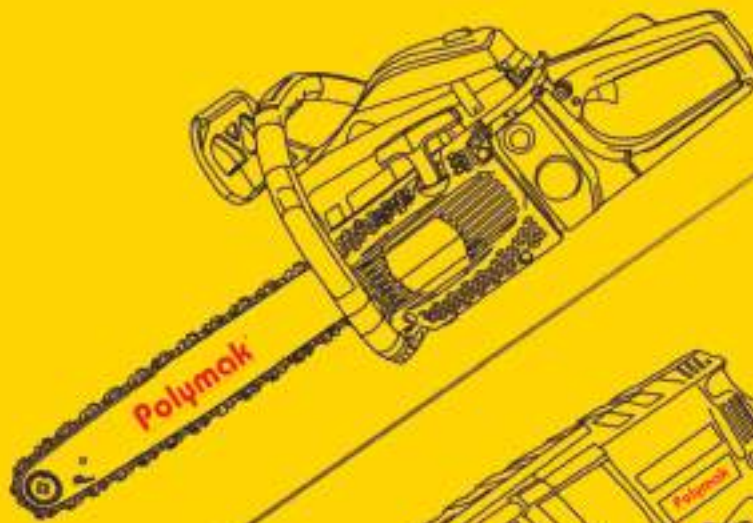

www.polymak.co.in

CORDLESS DRIVER DRILL



PM-CDD-12V-2B

Max. Drilling Capacity	10mm
Max. Torque (Max/Min)	20Nm / 18 Nm
No Load Speed	0-2800 / 1000rpm
Battery Capacity	1.5V (1.5Ah)
Weight	0.98 kg

CORDLESS DRIVER DRILL



PM-CDD-18V-2B

Max. Drilling Capacity	10mm
Max. Torque (Max/Min)	20 Nm / 18 Nm
No Load Speed	0-3000 / 1300 rpm
Battery Capacity	18V (1.5Ah)
Weight	1.4 kg

CORDLESS DRIVER DRILL



PM-13CDD-18VB-2B

Max. Drilling Capacity	13mm
Max. Torque (Max/Min)	70 Nm / 35 Nm
No Load Speed	0-900 / 0-1800 rpm
Battery Capacity	18V (4.0Ah)
Weight	2.1 kg

CORDLESS IMPACT DRILL



PM-CID-18V-2B

Driver Bit	6.35mm Hex
Max. Torque	120Nm
No Load Speed	0-2800rpm
Battery Capacity	18V (1.5Ah)
Blows per Minute	33000bpm
Weight	1.5 kg

CORDLESS IMPACT WRENCH



PM-CIW-18V-2BL

Max. Torque	300Nm
No Load Speed	0-2400rpm
Blows per Minute	3000bpm
Battery Capacity	18V (1.5Ah)
Weight	1.8 kg

CORDLESS ANGLE GRINDER



PM-CAG-18V-2B

Max. Wheel Diameter	125mm
No Load Speed	6500 rpm
Battery Capacity	18V (4.0Ah)
Weight	3.2 kg

CORDLESS BLOWER



PM-CBR-18VBL

Air Flow (Max/Min Volume)	15-20m ³ /min
Blade Blade Velocity	46-61m/s
No Load Speed	0-13000rpm
Battery Capacity	18V (1.5Ah)
Stroke	0.25m

CORDLESS TILE FIXING LAYER



PM-CTM-8.4V

Adhesive Capacity	3kg
Battery Capacity	8.4V (1.5Ah)
Weight	1.8kg

TILE CUTTER



PMCM4 Pro

Blade Dia	110 / 125 mm
No Load Speed	10000 rpm
Power	1100 W
Weight	3.0 kg

TILE CUTTER



PMCM415

Blade Dia	110-125mm
No Load Speed	10000 rpm
Input Power	1100 W
Weight	3.1 kg

TILE CUTTER



PMCM4SB

Blade Diameter	110mm/125mm
No Load Speed	10000 rpm
Input Power	1000 W
Weight	3.2 kg

TILE CUTTER



PMCM5

Blade Diameter	110mm/125mm
No Load Speed	10000 rpm
Input Power	1400 W
Weight	3.7 kg

DRILL



PMLDM68

Max. Drilling Capacity	10mm
No Load Speed	0-3000 rpm
Power	400 W
Weight	1.0 kg

DRILL



PM10HDM

Max. Drilling Capacity	10mm
No Load Speed	0-2500 rpm
Power	450 W
Weight	1.5 kg

DRILL



PM10DM-HD

Max. Drilling Capacity	10mm
No Load Speed	0-3400 rpm
Power	710 W
Weight	1.9 kg

DRILL



PM10TD

Max. Drill Capacity	10mm
No Load Speed	0-1320 rpm
Input Power	320 W
Weight	0.3 kg

IMPACT DRILL



PM10ID

Max. Drilling Capacity	10mm
No Load Speed	0-2900 rpm
Power	300 W
Weight	1.6 kg

IMPACT DRILL



PMID13-DY

Max. Drilling Capacity	13mm
No Load Speed	0-2600 rpm
Power	550 W
Weight	2.1 kg

IMPACT DRILL



PM13ID

Max. Drilling Capacity	13mm
No Load Speed	0-2600 rpm
Power	710 W
Weight	2.4 kg

ROTARY HAMMER



PM20RH-DY

Max. Drilling Capacity	20mm
No Load Speed	0-4000 rpm
Power	800 W
Max Impact Energy	2.2 J
Weight	2.4 kg

ROTARY HAMMER



PM22RH

Max. Drilling Capacity	22mm
No Load Speed	0-1000 rpm
Power	680 W
Max Impact Energy	2.2 J
Weight	2.6 kg

ROTARY HAMMER



PM25RH-DY

Max. Drilling Capacity	25mm
No Load Speed	0-1000 rpm
Power	950 W
Max Impact Energy	3.1 J
Weight	3.0 kg

ROTARY HAMMER



PM26RH

Max. Drilling Capacity	26mm
No Load Speed	0-1000 rpm
Input Power	800 W
Max Impact Energy	3.3 J
Weight	3.1 kg

DEMOLITION HAMMER



PMDH05-2P

Max Impact Energy	5 J
Blows Per Minute	3300 bpm
Input Power	400 W
Shank	17mm Hex
Weight	0.2 kg

DEMOLITION HAMMER



PMDH07

Max Impact Energy	8 J
Strokes Per Minute	3200 spm
Power	900 W
Stroke	32.0 Max
Weight	6.5 kg

DEMOLITION HAMMER



PMDH11P

Max Impact Energy	38 J
Strokes Per Minute	1000 - 1800 spm
Input Power	1000 W
Stroke	32.0 Max
Weight	11.4 kg

DEMOLITION HAMMER



PMDH15P

Max Impact Energy	45 J
Strokes Per Minute	1800 spm
Input Power	1500 W
Stroke	30mm Max
Weight	15.2 kg

CONCRETE VIBRATOR



PMCV3M

Telescopic Length	3 Mts
No Load Speed	4200 rpm
Power	1100 W
Weight	2.2 kg

CONCRETE CUTTER



PM355RS

Max. Blade Dia	250mm
No Load Speed	4000 rpm
Power	4000 W
Weight	14 kg

WALL CHASER



PM133WC

Max. Dia	130 mm
No Load Speed	3000 rpm
Power	2100 W
Weight	7.1 kg

MIXER



PM12EM-DY

Dia of Mixing Wheel	120x120mm
No Load Speed	0-900 rpm
Power	980 W
Spindle Size	M 12
Weight	1.8 kg

MIXER



PM16MD

Dia. of Mixing Wheel	160mm
No Load Speed	750 rpm
Power	660 W
Spindle Size	M12
Weight	2.1 kg

MIXER



PMEM-2S

Dia of Mixing Wheel	100x100mm
No Load Speed	0-900 rpm 2 Speed Gear Box
Power	1400 W
Spindle Size	M 12
Weight	1.8 kg

WALL SANDER



PM7W5

Disc Dia	160mm
No Load Speed	800-2600 rpm
Power	1100 W
Weight	2.2 kg

MAGNETIC DRILL



PM 6023-HD & PM 6025-HD

Max. Drilling Capacity	30mm	35mm
Magnetic Adhesion	15000N	15000N
No Load Speed	300 rpm	300-500
Feeders	MT2	MT2
Power	1850 W	2080 W
Weight	21 kg	22 kg

MAGNETIC DRILL



PM38MDAC

Max. Drilling Capacity	38mm
Magnetic Adhesion	14000 N
No Load Speed	0-800 rpm
Feeders	Weldon Shank
Power	1600 W
Weight	12 kg

ANGLE GRINDER**PMAG4-670B**

Max. Wheel Dia	100mm
No Load Speed	11000 rpm
Power	670 W
Weight	2.1 kg

ANGLE GRINDER**PMAG4-670S**

Max. Wheel Dia	100mm
No Load Speed	11000 rpm
Input Power	710 W
Weight	1.7 kg

ANGLE GRINDER**PMAG4-750B**

Max. Wheel Dia	100mm
No Load Speed	11000 rpm
Power	750 W
Weight	2.4 kg

ANGLE GRINDER**PMAG4-800S**

Max. Wheel Dia	100mm
No Load Speed	11000 rpm
Power	800 W
Weight	2.2 kg

ANGLE GRINDER**PMAG4-850B**

Max. Wheel Dia	100 mm
No Load Speed	11000 rpm
Power	850 W
Weight	1.8 kg

ANGLE GRINDER**PMAG4-803DY**

Max. Wheel Dia	100 mm
No Load Speed	11000 rpm
Power	1000 W
Weight	2.7 kg

ANGLE GRINDER**PMAG4-1050B**

Max. Wheel Dia	100mm
No Load Speed	11000 rpm
Input Power	1050 W
Weight	3.1 kg

ANGLE GRINDER**PMAG5-1000S**

Max. Wheel Dia	125mm
No Load Speed	11000 rpm
Input Power Weight	1000 W
Weight	2.5 kg

ANGLE GRINDER**PMAG5-1100B**

Max. Wheel Dia	125mm
No Load Speed	11000 rpm
Input Power Weight	1100 W
Weight	2.9 kg

ANGLE GRINDER**PMAG125**

Max. Wheel Dia	125mm
No Load Speed	7000 rpm
Power	120 W
Weight	3.5 kg

ANGLE GRINDER**PMAG180**

Max. Wheel Dia	180mm
No Load Speed	3600 rpm
Power	2400 W
Weight	4.9 kg

ANGLE GRINDER**PMAG230**

Max. Wheel Dia	230mm
No Load Speed	6000 rpm
Power	2800 W
Weight	4.9 kg

RECIPROCATING SAW



PM30RS

Cutting Capacity	~150 mm / max 90 mm
No. of Strokes	0-2000 /min
Power	900 W
Weight	3.2 kg

CHAIN SAW



PM16ECS

Bar/Chain Guide Bar	400mm (16")
Chain Pitch	3/8"
Chain Speed	90m/s / min
Power	2100 W
Weight	9 kg

PLANER



PM82EP500E

Planing width	80mm
Cutting Depth	1mm
No. Load Speed	1000 /min
Power	500 W
Weight	2.3 kg

PLANER



PM82EP710

Planing width	80mm
Cutting Depth	2mm
No. Load Speed	1000 /min
Power	710 W
Weight	3.1 kg

ROUTER



PM12ER

Cut Capacity	8 mm / 12 mm
No. Load Speed	23000 /min
Power	1100 W
Weight	5.5 kg

TRIMMER



PM6ET

Cut Capacity	6.5 mm
No. Load Speed	3300 /min
Power	600 W
Weight	1.3 kg

ORBITAL SANDER



PM125ROS

Disc Dia Capacity	125mm
Orbit	4000-12000 /min
Power	350 W
Weight	1.1 kg

DUAL ACTION POLISHER



PM125DAP

Max. Disc Dia	125 mm
Orbit Range	70 mm
No. Load Speed	2000-4000 /min
Power	950 W
Weight	3.2 kg

SANDER POLISHER



PMCP180

Max. Disc Dia	180mm
Speeds/Pre-set	M14
No. Load Speed	1000-3000 /min
Power	1300 W
Weight	4.2 kg

BLOWER



PM425BR

Air Flow	3.5m³/min
No. Load Speed	0-13000 /min
Power	450 W
Weight	1.4 kg

BLOWER



PM600BR

Air Flow	2.8m³/min
No. Load Speed	0-13000 /min
Power	600 W
Weight	1.4 kg

BLOWER



PM700BRV

Air Flow	2.4m³/min
No. Load Speed	0-13000 /min
Power	700 W
Weight	1.6 kg

BLOWER



PM800BR

Air Flow	4.5m³/min
No Load Speed	3000, 18000 rpm
Power	800 W
Weight	2.5 kg

HEAT GUN



PMHG1600E

Temperature	1-200°C/392-392°F
Air Flow Speed	1-200 LPM / 12-800 CFM
Power	1800 W
Weight	0.8 kg

HEAT GUN



PMHG2100

Temperature	1-300/392/720-920°F
Air Flow Speed	1-250 LPM / 12-800 CFM
Power	2000 W
Weight	0.8 kg

VACUUM CLEANER



PMVC30L

Power	1000 W
Voltage	220 V
Frequency	50 Hz
Capacity	30 L
Vacuum	> 18kPa
Weight	7.0 kg

VACUUM CLEANER



PMVC70L

Power	2000 W / 2700W
Voltage	220 V
Capacity	70 L
Pressure	> 20kPa
Weight	12 kg

AIR COMPRESSOR



PMAC30-0L

Input Voltage	240 V / 60 Hz
Input Power	2 HP
No Load Speed	2600rpm
Air Flow	100 L / Min
Max. Pressure	8 bar
Tank Capacity	30 L
Lubrication	Oil Free
Weight	11.5 kg

AIR COMPRESSOR



PMAC-50L

Input Voltage	220 V / 60 Hz
Input Power	2.5 HP
No Load Speed	2600rpm
Air Flow	200 L / Min
Max. Pressure	8 bar
Tank Capacity	50 L
Lubrication	Oil
Weight	17.5 kg

PRESSURE WASHER



PMCW80

Working Pressure	80 bar
Power	1000 W
Flow	320 L/hour
Motor Type	Induction / Copper
Weight	8.0 kg

PRESSURE WASHER



PMCW120N

Working Pressure	100 bar
Power	1600 W
Flow	360 L/h
Rated Voltage	220 V / 240 V
Motor Type	Induction / Copper
Weight	10.1 kg

PRESSURE WASHER



PMCW130

Working Pressure	130 bar
Power	1400 W
Flow	480 L/h
Motor Type	Induction / Copper
Weight	9.7 kg

PRESSURE WASHER



PMCW-140S

Working Pressure	140 bar
Power	1800 W
Flow	360 L/h Self-Priming Pump
Pressure	Adjustable Pressure
Motor Type	Induction / Copper
Weight	14 kg

PRESSURE WASHER



PMCW300 PRO

Working Pressure	300 bar
Power	3300 W
Flow	780 L/h
Motor Type	Induction / Copper
Weight	20 kg

FLOOR SWEEPER



PMF550L

Date	Manual
Dustbin Capacity	50L
Sweep	8 mm ϕ
Speed	3000 RPM
Grounding Width	800mm

PNEUMATIC DIE GRINDER



P-ADG-6LN

Dialer Capacity	6 mm ϕ (1/2")
No Load Speed	21000 rpm
Air Inlet	10mm ϕ (3/8")
Weight	0.3 kg

GASOLINE CHAIN SAW



PMCS-5818 PMCS-5822

Engine	Single Cylinder 2 Stroke, Air Cooled
Engine Displacement	56cc
Rated Input Power	2.28 kW
Fuel Tank Capacity	180 ml
Engine Oil Tank Capacity	260 ml
Idling Speed	3000-3200 rpm
Oil / Fuel Mixing Ratio	1:25
Guide Bar & Chain Length	400mm (16") / 12 Links
	500mm (20") / 16 Links
Weight	6.5 kg / 6.3 kg

TILLER



PMBC52 TILLER

Engine	Single Cylinder 2 Stroke, Air Cooled
Engine Displacement	52cc
Rated Input Power	2 HP
Fuel Tank Capacity	1500ml
Idling Speed	3000-3200 rpm
Weight	10kg

PNEUMATIC DIE GRINDER



PM-PDG6

Dialer Capacity	6 mm ϕ
No Load Speed	20000 rpm
Air Inlet	6 mm ϕ
Weight	0.6 kg

PNEUMATIC WRENCH



PM-PIW-1/2

Free Speed	7000rpm
Air Inlet	3/8" (1")
Capacity Bolt Size	5/8" (16mm)
Working Torque	400N \cdot m (30kg \cdot m)
Overall Length	7.3 (18.5) inch
Oil Inlet	1/2"
Max Working Pressure	90 PSI (6.2 bar)
Max Air Consumption	9.0 (0.162) L/min
Reg. Air Conn.	3/8"
Weight	2.0 kg

BRUSH CUTTER



PMBC-500Y

Engine	Single Cylinder 2 Stroke, Air Cooled
Engine Displacement	50cc
Rated Input Power	1.91 kW
Fuel Tank Capacity	1300 ml
Idling Speed	3000-3200 rpm
Oil / Fuel Mixing Ratio	1:25
Shaft Diameter	25mm, Straight Axle
Head Shaft	30mm
Weight	9 kg

PADDY CUTTER



PMBC52-BPP

Engine	Single Cylinder 2 Stroke, Air Cooled
Engine Displacement	52cc
Rated Input Power	2 HP
Fuel Tank Capacity	1500ml
Idling Speed	3000-3200 rpm
Weight	10kg

PNEUMATIC DIE GRINDER



P-ADG-6PG

Dialer Capacity	6 mm ϕ (1/2")
No Load Speed	20000 rpm
Air Inlet	6 mm ϕ (1/2")
Weight	0.45 kg

GASOLINE CHAIN SAW



PMCS-56-180Y PMCS-56-220Y

Engine	Single Cylinder 2 Stroke, Air Cooled
Engine Displacement	56cc
Rated Input Power	2.32 kW
Fuel Tank Capacity	180 ml
Engine Oil Tank Capacity	260 ml
Idling Speed	3000-3200 rpm
Oil / Fuel Mixing Ratio	1:25
Guide Bar & Chain Length	400mm (16") / 12 Links
	500mm (20") / 16 Links
Weight	6.0 kg / 6.3 kg

BRUSH CUTTER



PMBC52

Engine	Single Cylinder 2 Stroke, Air Cooled
Engine Displacement	52cc
Rated Input Power	1.9 kW
Fuel Tank Capacity	1300 ml
Idling Speed	3000-3200 rpm
Oil / Fuel Mixing Ratio	1:25
Shaft Diameter	25mm, Straight Axle
Head Shaft	30mm
Weight	9 kg

EARTH AUGER



PMEA150

Engine Model	52cc-5
Air Cooled Engine Cylinder	2 Stroke
Displacement	51.7cc
Engine Power	1.4 kW (1.9 HP)
Idling Speed	3000-3200 rpm
Fuel Tank Capacity	1000 ml
Diameter of Drill Bit	150mm

KNAPSACK MANUAL SPRAYER



PM-KS-16L

Tank Capacity	16 L
Flow	3 L/min
Nozzling Pressure	1.05 MPa
Weight	2.7 kg

KNAPSACK MANUAL & BATTERY SPRAYER



PM-KS-EM-16L

Tank Capacity	16 L
Flow	3 L/min
Working Pressure	0.25-0.45 MPa
Battery	12V/5A
Weight	6.2 kg

ARC WELDING INVERTER



PM200YE

Rated Input Voltage	AC220V
Rated Input Current	20A/25
Power Capacity (KVA)	4.5KW
Output Current Range (A)	20-200A
Output Open-Circuit Voltage(V)	30
Rated Duty Cycle (%)	60
Arc Force	-
Power Efficiency (%)	85
Power Factor	0.73
Protection & Insulation Class	-
Applicable Rod (mm)	2.5/3.15
MCN/GBT	MCN/GBT
Weight (kg)	7 kg

ARC WELDING INVERTER



PM-MMA220-DY

Rated Input Voltage	AC 200V
Rated Input Current	205A / 29A
Rated Input Power Capacity(KVA)	4 KW
Output Current Range (A)	20-200 A
Output Open-Circuit Voltage(V)	30
Rated Duty Cycle (%)	60
Arc Force	0-100
Power Efficiency (%)	85
Power Factor	0.73
Protection & Insulation Class	IP 21S.H
Applicable Rod (mm)	2.5 / 3.15
MCN / GBT	GBT
Weight (kg)	3.65 kg

ARC WELDING INVERTER



PM300Y

Rated Input Voltage	AC220V + 10% 3000Hz
Rated Input Current	30
Power Capacity (KVA)	6
Output Current Range (A)	20-300A
Output Open-Circuit Voltage(V)	30
Rated Duty Cycle (%)	60
Arc Force	0-100
Power Efficiency (%)	85
Power Factor	0.73
Protection & Insulation Class	IP21S.F
Applicable Rod (mm)	2.5/3.15/4.0
MCN/GBT	GBT
Weight (kg)	5 kg

ARC WELDING INVERTER



PM300Y-III

Rated Input Voltage	AC415V 50/60Hz
Rated Input Current	30
Power Capacity (KVA)	6
Output Current Range (A)	20-300A
Output Open-Circuit Voltage(V)	30
Rated Duty Cycle (%)	60
Arc Force	0-100
Power Efficiency (%)	85
Power Factor	0.73
Protection & Insulation Class	IP21S.F
Applicable Rod (mm)	2.5/3.15/4.0
MCN/GBT	GBT
Weight (kg)	5.1 kg

ARC WELDING INVERTER



PM400R

Rated Input Voltage	AC415V + 10% 50/60Hz
Rated Input Current	40A/30A
Power Capacity (KVA)	16.4
Output Current Range (A)	40-400A
Output Open-Circuit Voltage(V)	30
Rated Duty Cycle (%)	60
Arc Force	0-100
Power Efficiency (%)	85
Power Factor	0.82
Protection & Insulation Class	-
Applicable Rod (mm)	2.5/3.15/4.0
MCN/GBT	GBT
Weight (kg)	11 kg

ARC WELDING INVERTER



PM400Y

Rated Input Voltage	AC415V + 10% 50/60Hz
Rated Input Current	40A/30A
Power Capacity (KVA)	16.4 KW
Output Current Range (A)	40-400A
Output Open-Circuit Voltage(V)	30
Rated Duty Cycle (%)	60
Arc Force	0-100
Power Efficiency (%)	85
Power Factor	0.82
Protection & Insulation Class	-
Applicable Rod (mm)	2.5/3.15/4.0/5.0
MCN/GBT	GBT
Weight (kg)	10 kg

ARC WELDING INVERTER



PM630Y

Rated Input Voltage	AC415V + 10% 50/60Hz
Rated Input Current	30
Power Capacity (KVA)	40
Output Current Range (A)	40-600
Output Open-Circuit Voltage(V)	30
Rated Duty Cycle (%)	60
Arc Force	0-100
Power Efficiency (%)	85
Power Factor	0.82
Protection & Insulation Class	IP21S.F
Applicable Rod (mm)	2.5/3.15/4.0/5.0/6.0
MCN/GBT	GBT
Weight (kg)	47 kg

MIG WELDING INVERTER



MIG250Y

Rated Input Voltage	AC220V
Rated Input Current	30
Power Capacity (KVA)	6
Output Current Range (A)	20-200
Output Open-Circuit Voltage(V)	30
Rated Duty Cycle (%)	60
Pre-Flow Time (sec)	1
Power Efficiency (%)	85
Power Factor	0.7
Protection & Insulation Class	IP21S.F
Applicable Rod Wire Size (mm)	0.8/0.9 & 1.0mm
MCN/GBT	GBT
Weight (kg)	10 kg

MIG WELDING INVERTER



MIG250Y-III

Rated Input Voltage	AC415V + 10% 50/60Hz
Rated Input Current	30
Power Capacity (KVA)	6
Output Current Range (A)	20-200
Output Open-Circuit Voltage(V)	30
Rated Duty Cycle (%)	60
Pre-Flow Time (sec)	1
Power Efficiency (%)	85
Power Factor	0.7
Protection & Insulation Class	IP21S.F
Applicable Rod Wire Size (mm)	0.8/0.9 & 1.0mm
MCN/GBT	GBT
Weight (kg)	10 kg

MIG WELDING INVERTER



MIG400Y

Rated Input Voltage	AC415V + 10% 50/60Hz
Rated Input Current	30
Power Capacity (KVA)	16
Output Current Range (A)	40-400
Output Open-Circuit Voltage(V)	30
Rated Duty Cycle (%)	60
Pre-Flow Time (sec)	1
Power Efficiency (%)	85
Power Factor	0.7
Protection & Insulation Class	IP21S.F
Applicable Rod Wire Size (mm)	0.8/1.0/1.2mm
MCN/GBT	GBT
Weight (kg)	17 kg

MIG WELDING INVERTER



MIG500Y

Rated Input Voltage	AC220V ~ 10% 50/60Hz
Rated Input Current	20
Power Capacity (VA)	30
Output Current Range (A)	40-100/150
Output Open Circuit Voltage(V)	60
Rated Duty Cycle (%)	60
Post Flow Time (sec)	1
Power Efficiency(%)	85
Power Factor	0.9
Protection & Insulation Class	IP21SF
Applicable Rod Wire Size (mm)	1.2-1.8mm
MOQ/SET	1SET
Weight (kg)	26kg

MIG WELDING INVERTER



MIG630Y

Rated Input Voltage	AC220V ~ 10% 50/60Hz
Rated Input Current	30
Power Capacity (VA)	40
Output Current Range (A)	40-100/150
Output Open Circuit Voltage(V)	60
Rated Duty Cycle (%)	60
Post Flow Time (sec)	1
Power Efficiency(%)	85
Power Factor	0.9
Protection & Insulation Class	IP21SF
Applicable Rod Wire Size (mm)	1.2-1.8mm
MOQ/SET	1SET
Weight (kg)	31 kg

TIG WELDING INVERTER



PM TIG200

Rated Input Voltage	AC220V ~ 10% 50/60Hz
Rated Input Current	17
Power Capacity (VA)	5
Output Current Range (A)	20-100 (MAX) 40/60
Output Open Circuit Voltage(V)	50
Rated Duty Cycle (%)	60
Post Flow Time (sec)	7
Air Force	1#
Power Efficiency(%)	85
Power Factor	0.95
Protection & Insulation Class	IP21SF
Applicable Rod Wire Size (mm)	2.0mm-3.15mm
MOQ/SET	1SET/SET
Weight (kg)	10.5 kg

TIG WELDING INVERTER



PM TIG 400 P

Rated Input Voltage	415±10, 3PH, 50/60Hz
Rated Input Power (VA)	25
Rated Duty Cycle (%)	60%
Power Factor	0.91
Protection & Insulation Class	IP21SF
Efficiency	85%
Output Open Circuit Voltage(V)	70
Current Range	20 ~ 400
MOQ /SET	1SET
Weight	30 kg

TIG WELDING INVERTER



PM TIG 315P ACDC

Rated Input Voltage	415±10, 3PH, 50/60Hz
Rated Input Current	15
Rated Input Power	60%
Power Factor	0.90
Output Current Range (A)	25, 300/150
Output Open Circuit Voltage	20-200 (MAX)
Rated Efficiency(%)	85
Power Factor	0.92
Protection & Insulation Class	IP21SF
Applicable Rod Wire Size (mm)	2.0MM-3.15 MM
MOQ/SET	1SET
Weight (kg)	37.5 kg

AIR PLASMA CUTTER



PM CUT40 INVERTER WELDING MACHINE

Rated Input Voltage	AC220V ~ 10% 50/60Hz
Rated Input Current	20.8
Power Capacity (VA)	5
Output Current Range (A)	20-40
Output Open Circuit Voltage(V)	230
Rated Duty Cycle (%)	60
Post Flow Time (sec)	5
Air Force	1#
Power Efficiency(%)	85
Power Factor	0.88
Protection & Insulation Class	IP21SF
Quality Cut Thickness (mm)	6
MOQ/SET	1SET/SET
Weight (kg)	11.5 kg

AIR PLASMA CUTTER



PM CUT70

Input Voltage	415V ~ 15.3PH 50/60Hz
Rated Input Current	11
Rated Duty Cycle (%)	60
Open Circuit Voltage	230
Perfect Cutting Thickness	15mm
MOQ/SET	MOQ 2# PLS
Set	1# 60 2# 60
Recommended Air Compressor	3# 4# ~ 60 L/min
Weight	25 kg

AIR PLASMA CUTTER



PM CUT80

Input Voltage	415V ~ 15.3PH 50/60Hz
Rated Input Current	11
Rated Duty Cycle (%)	60
Open Circuit Voltage	230
Perfect Cutting Thickness	15mm
MOQ/SET	MOQ 2# PLS
Set	1# 60 2# 60
Recommended Air Compressor	3# 4# ~ 60 L/min
Weight	25 kg

AIR PLASMA CUTTER



PM CUT100

Input Voltage	415V ~ 15.3PH 50/60Hz
Rated Input Current	23
Rated Duty Cycle (%)	60
Open Circuit Voltage	230
Perfect Cutting Thickness	20mm
MOQ/SET	MOQ 2# PLS
Set	1# 60 2# 60
Recommended Air Compressor	3# 4# ~ 210 L/min
Weight	37.5 kg

AIR PLASMA CUTTER



PM CUT120

Input Voltage	415V ~ 15.3PH 50/60Hz
Rated Input Current	23
Rated Duty Cycle (%)	60
Open Circuit Voltage	230
Perfect Cutting Thickness	25mm
MOQ/SET	MOQ 3# 60 1# PLS
Set	1# 60 2# 60
Recommended Air Compressor	3# 4# ~ 210 L/min
Weight	41.5 kg

AIR PLASMA CUTTER



PM CUT 160

Input Voltage (V)	415±10, 3PH, 50/60Hz
Rated Input Power (VA)	25
Rated Duty Cycle (%)	60
Perfect Cutting Thickness	40UM
MOQ/SET	1SET
TECH-	3 Mpa
Recommended Air Compressor	7.5# ~ 300 L/min
Weight	47.5 kg

ABRASIVES



ACCESSORIES



PERSONAL PROTECTION EQUIPMENT



CELO FIXINGS



Polymak Tools (India) Pvt. Ltd. an ISO 9001:2008 certified company with more than a decade old in the power tools and related accessories industry and managed by professionals with over 100 years of experience between them with through knowledge of product, application, servicing and the market.

Polymak products are distributed all over India through a network of over 400 Authorized Channel Partners. Field personnel are posted in all major cities and towns.

To meet the requirement of the market, Polymak products are stored in warehouses covering more than 50,000 sq. ft.

Marketed & Serviced by:

Polymak[®]

Polymak Tools (India) Pvt. Ltd.

186/187, P.H. Road, Alsa Towers,

Kilpauk, Chennai - 600 010.

Tel : 044 48631869 Email : info@polymak.co.in

Authorized Channel Partner

